



Proudly Australian Built



Technical features

- * Turning Capacity 10,000 Kg, combined with a minimum of one **SW-3TRI-2000** Idler.
- * Pipe/Vessel diameter range 0.4 – 2 & 0.4 – 3.0 m
- * Variable Speed Range 100 – 600 mm/min surface speed
- * Recessed digital speed readout for precise control of welding speed.
- * Digital VFD control, with in-built safety features & overload protection.
- * Solid natural rubber wheels 400 mm Dia x 150 mm wide
- * Precision aligned all welded frame for no creep rotation.
- * Quality hand pendant with 10m shielded cable & mil spec plug standard. Operations, fwd/rev, variable speed & E-stop.
- * 3-ton Idler **SW-3TRI-2000** single wheel set

Check total SWL capacity when choosing the number of Idlers

- * Electrical compliance to AS/NZS 3000-2009

Smithweld Enterprises Pty Ltd


227 Bank Street
Welshpool WA 6106

Tel: 61 8 9470 6670

Product Information

SMITHWELD ENTERPRISES PTY LTD

PIPE/VESSEL ROTATOR 10,000 Kg Capacity **Model SW-10TR-4**

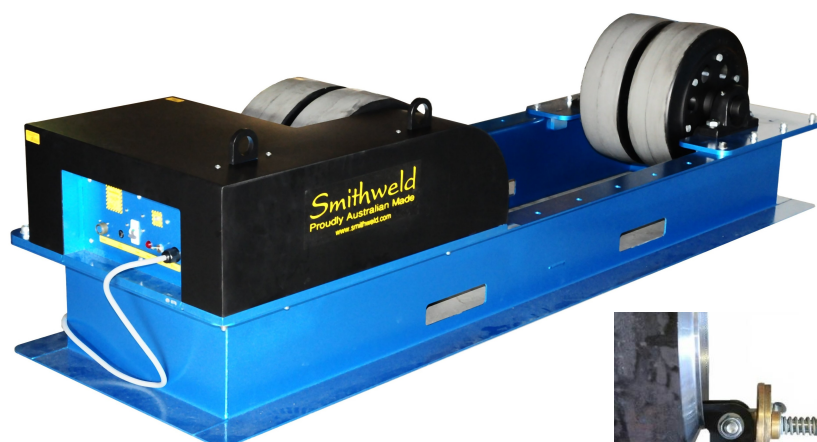

Hand pendant
SW-XTR-HT10



Optional
Twin axis rotary welding earth **SW-XYREC-300/400**



Optional
H-duty foot control **SW-10F** with 10m of rubber cable

Specifications

Capacity:	10,000 Kg max
Voltage:	240 VAC 1ph
Speed range:	100 – 600 mm/min
Overload protection:	Current (A) Voltage (V) Torque (Nm)

Dimensions

Length:	240 cm
Width:	60 cm
Height:	50 cm
Weight:	290 Kg main drive 215 Kg idler



© 2014