



Proudly Australian Built



Features

- * Tilt - rotate capacity 1000 Kg
- * Tilt/rotate control for best weld Position & production
- * Pipe diameter range 50 – 200mm
- * Variable speed range 0 – 3rpm
- * Recessed digital speed Readout & controls
- * All welded construction
- * Solid 150mm. rubber wheels
- * Ideal for s/steel piping
- * Inbuilt rotary earth 300 A
- * Optional foot switch SW-10F
- * Optional 150mm chuck for 50-75mm pipe as shown
- * Optional adjustable swivel Head Rubber or steel wheel mobile pipe stand. Model SW-300RR or RS
- * **Electrical compliance to AS/NZS 3000-2009**

Smithweld Enterprises Pty Ltd

227 Bank Street
Welshpool WA 6106

Tel: 61 8 9470 6670

Email: sales@smithweld.com


Product Information

SMITHWELD ENTERPRISES PTY LTD

PIPE POSITIONER/ROTATOR

50 – 200mm diameter

Model SW-200RP-2

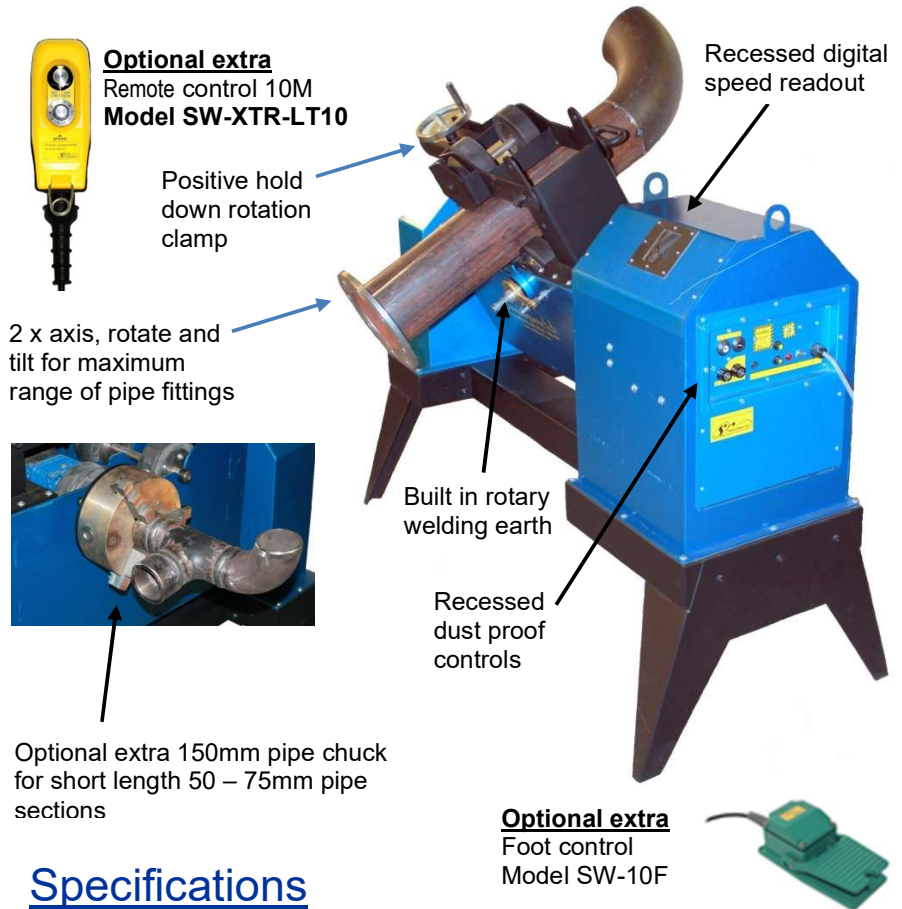

Optional extra 150mm pipe chuck for short length 50 – 75mm pipe sections

Specifications

Tilt load Capacity:	500 Kg
Chuck Capacity:	100 Kg
Voltage:	220 - 240 VAC 1PH

External Dimensions

Length:	155 cm
Width:	70 cm
Height:	130 cm
Net Weight:	200 Kg

© 2016

