



Proudly Australian Built



Technical Features

- * Turning capacity 25,000 Kg when combined with a minimum of 3 **SW-6TRI-4** Idler units.
 - * Pipe/Vessel diameter range 0.3 – 3 m.
 - * Variable speed range 100 – 600 mm/min surface speed
 - * Recessed controls & digital speed readout for precise control of welding speed.
 - * Quality hand pendant **SW-XTR-HT10** with 10m shielded cable & mil spec plug standard. Operation, fwd/rev, variable speed & E-stop.
 - * Solid natural rubber wheels in (mm) 525 Dia x 450 wide main drive 525 Dia x 300 wide idler set
 - * Precision aligned all welded frame for no creep rotation
 - * Ample lifting eyes and fork lifting slots provided
 - * 6 Tonne Idler **SW-6TRI-4** twin wheel sets
- Check total SWL capacity when choosing the number of idlers**
- * Electrical compliance to AS/NZS 3000-2009

Smithweld Enterprises Pty Ltd

227 Bank Street
Welshpool WA 6106


Tel: 61 8 9470 6670

Email: sales@smithweld.com

Product Information

SMITHWELD ENTERPRISES PTY LTD

PIPE/VESSEL ROTATOR 25,000kg Capacity Model SW-25TR-6

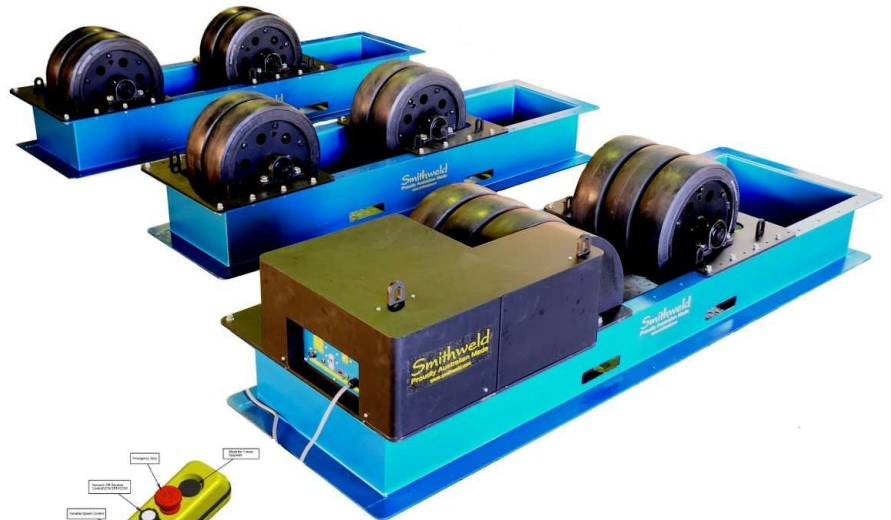

Hand pendant
SW-XTR-HT10



Optional
H-duty foot control
SW-10F with 10m
of rubber cable



Optional
Twin axis rotary
welding earth
SW-XYREC-300/400

Specifications

Capacity:	25,000 Kg
Voltage:	240 VAC 1ph
Speed range:	100 – 600 mm/min
Overload protection:	Current (A) Voltage (V) Torque (Nm)

Dimensions

Main frame length:	3000 mm
Width:	860 mm
Height:	630 mm
Weight:	650 Kg main drive 350 Kg idler



© 2012