



Proudly Australian Built




Technical Features

- * Linear X-Y fine adjusters for vertical-horizontal alignment of the welding head.
- * Sizes available range from 200 - 600mm for both X & Y axis.
- * Carrying capacity 150 Kg
- * **Application**, Suitable for fitting to standard welding boom or fixed welding station.
- * Available as manual or motorised

Product Information

SMITHWELD ENTERPRISES PTY LTD

SAW – FCAW X-Y Linear Adjusters SW-XYLA-30-30

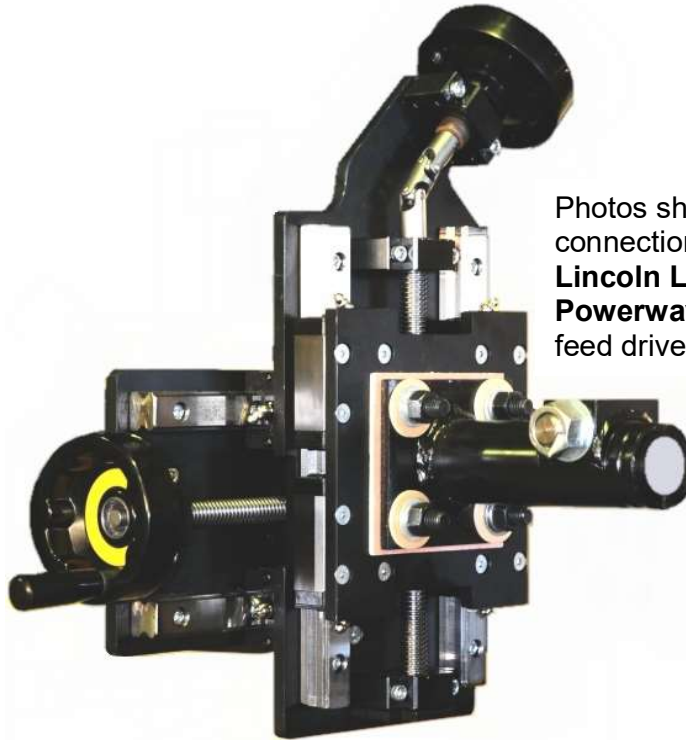

Photos shows connection for the **Lincoln LN** series or **Powerwave™** wire feed drives.

Specifications

* <u>Model#.</u>	Effective adjustment. (Y-axis) (X-axis)
*SW-XYLA-30-30	200mm (X) - 200mm (Y)
* SW-XYLA-30-40	200mm (X) - 300mm (Y)
* SW-XYLA-40-40	300mm (X) - 300mm (Y)
* SW-XYLA-40-50	300mm (X) - 400mm (Y)
* SW-XYLA-40-60	300mm (X) – 500mm (Y)

**Smithweld Enterprises
Pty Ltd**

227 Bank Street
Welshpool WA 6106

Tel: 61 8 9470 6670
Fax: 61 8 9470 6680

Email: sales@smithweld.com

© 2012

